

Industrial Batteries / Network Power


Sprinter XP-FT



Xtra-Power



**»Premium Quality.
Maintenance-free.Operational Reliability«**



Sprinter[®]

Network Power

Reliable back-up power for every need

GNB® Industrial Power offers reliable energy storage solutions for critical systems requiring uninterrupted power supply. With a comprehensive product range based on state-of-the-art technologies, GNB delivers the right battery for every application.

The below table is only indicative and depends on the specific customer application. For more information please ask a GNB sales representative.

APPLICATIONS	BATTERY RANGES																		
	Sonnenschein						Marathon			Sprinter		Absolyte	Powerfit	Classic					
	A400/A600	A400 FT	A500	SOLAR	RAIL	Power Cycle	M-FT	FTX	L/XL	P/XP	XP-FT	GP/GX	S100/S100L/S300	OCSM	OPzS	Energy Bloc/OGi	OPzS Solar	EnerSol	rail
UPS Data Centre	●	●	●			●	●	●	●	●	●	●		●		●			
Industrial UPS	●	●	●			●	●	●	●	●	●	●		●		●			
Telecom Good grid	●	●				●	●	●	●	●					●	●			
Telecom Poor & Off-grid				●		●						●		●			●		
Renewable				●		●						●					●	●	
Emergency lighting	●	●	●			●	●	●	●	●	●	●	●		●	●	●		
Security	●		●						●	●		●	●	●	●				
Utility	●	●				●	●	●	●			●		●	●	●			
Railways	●	●	●		●	●	●	●				●		●		●			●

Powerful product brands



- > VRLA batteries (Valve Regulated Lead Acid) in which the electrolyte is fixed in an Absorbent Glass Mat (AGM)
- > Excellent high current capability
- > Very economical
- > Maintenance-free (no topping up)



- > VRLA batteries (Valve Regulated Lead Acid) in which the electrolyte is fixed in a gel (dryfit® technology)
- > Inventor of Gel technology
- > Highest reliability, even in non-optimal conditions
- > Particularly suitable for cyclic applications
- > Maintenance-free (no topping up)



- > Conventional lead-acid batteries with liquid electrolyte
- > Extreme reliability, proven over decades
- > Low maintenance

Sprinter XP-FT

Front Terminal AGM battery for high rate applications

Sprinter XP batteries are recognized for their incredibly high power density and impressive reliability for very short up to long back-up times. The Sprinter XP-FT comes with practical front terminal access which greatly facilitates installation and maintenance.

The proven Sprinter XP technology confirms GNB's extensive experience and worldwide leadership in VRLA technology.

Your benefits:

- > Improved Total Cost of Ownership - due to a very long design life: 12 years
- > Enhanced power density compared to standard front terminal batteries – small footprint
- > Optimised design for high current discharges
- > Front Terminal design with handles – easy access for faster installation and maintenance
- > Low self-discharge rate – extended storage capability
- > Very short recharge time – high availability
- > Maintenance free – no topping-up




Technical characteristics and data

Type	Part number	Nom. voltage V	Power 10 min 1.60 Vpc 20°C W/block	Nominal capacity C ₁₀ 1.80 Vpc 20°C Ah	Length (l) max. mm	Width (b/w) max. mm	Height (h) max. mm	Weight approx. kg	Internal resistance mOhm*	Short circuit current A*	Terminal
XP12V4400FT	NAPF124400HP0FB	12	4380	155	559	125	283	54.3	4.0	3160	F-M6-90°
XP12V5300FT	NAPF125300HP0FB	12	5300	186	559	125	318	60.0	3.2	3892	F-M6-90°

*According to IEC 60896-21/22

Specification:

- > Design life: »>12 years– Very Long Life« according to EUROBAT 2015 Classification
- > High-compression Absorbent Glass Mat (AGM) technology
- > Designed in accordance with IEC 60896-21/-22
- > Grid plates with superior lead low calcium high tin alloy
- > Very low gassing due to internal gas recombination (99% efficiency)
- > Approval: Underwriters Laboratories (UL)
- > Available with standard or flame retardant (UL94 V-0) container
- > Central degassing feature available
- > No restrictions for rail, road, sea and air transportation (IATA, DGR clause A67) of operational blocks
- > Manufactured in Europe in ISO 9001 certified production plants




Design life
>12 years -
Very Long
Life



Nominal capacity
155 -186 Ah



Block battery



Grid plate



Recyclable



Valve regulated
lead-acid
batteries



Maintenance
free (no
topping up)



Special high
current
performance



Sprinter XP-FT

Constant current discharge

1.90 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	299	294	242	206	146	115	96	57.8	41.3	26.5	17.2	14.0
XP12V5300FT	330	309	268	237	173	132	110	64.6	47.0	30.8	20.5	17.0

1.85 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	368	340	278	237	166	129	106	63.4	45.2	28.7	18.8	15.3
XP12V5300FT	443	402	336	286	196	144	122	70.7	49.7	32.8	22.2	18.4

1.80 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	414	381	314	268	185	141	113	65.9	47.2	29.9	19.6	16.0
XP12V5300FT	525	469	377	314	210	148	126	73.6	52.5	34.2	23.1	19.2

1.75 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	464	424	345	287	194	145	116	68.0	48.4	30.9	20.2	16.4
XP12V5300FT	618	546	425	346	225	155	130	76.7	55.0	35.8	23.6	19.5

1.70 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	572	505	386	314	201	148	117	68.7	48.9	31.2	20.3	16.5
XP12V5300FT	700	608	464	375	237	167	133	78.7	56.5	36.1	23.8	19.7

1.65 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	649	560	417	333	205	150	118	69.4	49.3	31.5	20.4	16.6
XP12V5300FT	773	664	494	397	247	177	136	79.9	57.0	36.4	24.0	19.9

1.60 Vpc – Discharge in A at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	731	618	443	345	209	152	119	70.1	49.9	31.8	20.6	16.7
XP12V5300FT	834	706	517	412	253	180	138	80.8	57.1	36.6	24.1	20.0

Sprinter XP-FT

Constant power discharge

1.90 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	1483	1483	1483	1483	1483	1159	958	669	510	340	227	185
XP12V5300FT	3966	3708	3162	2730	1998	1419	1254	736	538	353	238	198

1.85 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	4120	3729	3039	2565	1741	1318	1071	709	525	350	233	190
XP12V5300FT	4635	4223	3502	2987	2112	1513	1331	774	556	363	244	203

1.80 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	4800	4377	3523	2915	1957	1473	1185	758	556	358	234	192
XP12V5300FT	5408	4944	4017	3451	2421	1660	1440	805	577	374	250	207

1.75 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	5356	4810	3790	3141	2081	1555	1246	773	557	360	235	192
XP12V5300FT	6180	5562	4378	3708	2524	1729	1479	826	590	381	254	210

1.70 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	5995	5335	4172	3409	2194	1607	1267	783	561	363	236	192
XP12V5300FT	7004	6129	4738	3873	2678	1810	1517	863	616	393	261	214

1.65 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	6283	5562	4305	3502	2225	1627	1287	788	564	363	237	192
XP12V5300FT	7622	6695	5202	4172	2760	1896	1546	908	646	409	270	220



1.60 Vpc – Discharge in W/block at 25 °C

Type	3 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h
XP12V4400FT	6860	5995	4511	3605	2266	1648	1298	793	567	364	238	193
XP12V5300FT	8034	7056	5459	4326	2781	1945	1560	938	663	419	273	224


Sprinter XP-FT

Drawings, terminal and torque

Drawings, terminal and torque

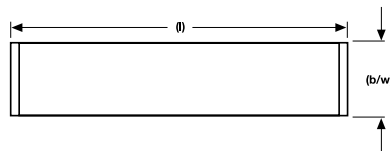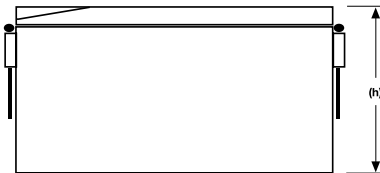

Not to scale!



11 Nm

Battery Service – Energy Solutions

GNB® Service

Who could do this job better than the professionals from a company with more than 120 years of experience in battery development, production and operation?

Leave the responsibility for the maintenance of your batteries and chargers to the experts: a GNB® service contract provides you with exceptional economic advantages through time and cost savings as well as higher safety!



Installation of Batteries and Systems for Network Power

- > Development of complete turnkey solutions from the design concept to installation and commissioning
- > Installation according to legal and safety regulations including CE certification by approved installation technicians
- > Training and certification of external installation technicians according to CE regulations



»GNB Service – individualized, professional and all over Europe!«

Exide Technologies, with operations in more than 80 countries and more than 130 years of experience, is one of the world's largest producers and recyclers of lead-acid batteries. The company develops state-of-the-art energy storage solutions for the automotive and industrial market. Leading car, truck and lift truck manufacturers trust in Exide Technologies as an original equipment supplier. Exide also serves the aftermarket through a portfolio of successful and well-known brands.

Exide Transportation manufactures batteries for light and commercial vehicles, as well as agricultural and marine leisure applications. Industrial markets – under the division **GNB Industrial Power** – include efficient energy storage solutions for motive power applications such as lift trucks, cleaning machines and other commercial electrical vehicles, and network power applications such as telecommunications systems, renewables, and uninterruptible power supply (UPS).

Exide's engineers have always been at the forefront of bringing important innovations to the industry. Exide's ISO/TS-certified manufacturing facilities ensure that customers receive products that are produced with maximum efficiency and fulfill the highest quality standards, while minimizing impact on the environment.

Exide's extensive sales and distribution network provides quality service and delivers on time to its customers. Its world-class recycling facilities ensure that batteries will be reused, helping to make a positive contribution to the environment. Exide also provides services, accessories and energy consulting to its clients.

- Headquarters
- Manufacturing plants
- Recycling plants
- Distribution centers
- Main sales offices
- R&D centres

Manufacturing plants ISO 9001 and ISO 14001 certified
Automotive plants IATF 16949 approved



NXPPWTEPDE01020 Subject to alterations